



RESEARCH ARTICLE

Harnessing volcanic ash for benzene mitigation and maize seed enhancement

K N Vinoth¹, R Jerlin^{1*}, T Eevera¹, M Djanaguiraman², V Manonmani¹, S Kavitha¹, V Vakeswaran¹, J Renugadevi¹ & D Thirusendura Selvi¹

¹Department of Seed Science and Technology, Tamil Nadu Agricultural University, Coimbatore 641 003, India

²Department of Crop Physiology, Tamil Nadu Agricultural University, Coimbatore 641 003, India

*Email: rjerlin@tnau.ac.in



ARTICLE HISTORY

Received: 13 December 2024

Accepted: 16 January 2025

Available online

Version 1.0 : 08 July 2025

Version 2.0: 14 July 2025



Additional information

Peer review: Publisher thanks Sectional Editor and the other anonymous reviewers for their contribution to the peer review of this work.

Reprints & permissions information is available at https://horizonepublishing.com/journals/index.php/PST/open_access_policy

Publisher's Note: Horizon e-Publishing Group remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Indexing: Plant Science Today, published by Horizon e-Publishing Group, is covered by Scopus, Web of Science, BIOSIS Previews, Clarivate Analytics, NAAS, UGC Care, etc See https://horizonepublishing.com/journals/index.php/PST/indexing_abstracting

Copyright: © The Author(s). This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution and reproduction in any medium, provided the original author and source are credited (<https://creativecommons.org/licenses/by/4.0/>)

CITE THIS ARTICLE

Vinot KN, Jerlin R, Eevera T, Djanaguiraman M, Manonmani V, Kavitha S, Vakeswaran V, Renugadevi J, Thirusendura SD. Harnessing volcanic ash for benzene mitigation and maize seed enhancement. Plant Science Today. 2025; 12(3): 1-13. <https://doi.org/10.14719/pst.6685>

Abstract

The presence of Benzene in aqueous solution is a great concern for the health-related issues of the living things that consume the same. Among various removal methods, the adsorption method with volcanic ash is a less laborious and eco-friendly process. With this notion, the seeds and grains of maize COH (M) 8 were coated with volcanic ash and they are utilized in this study as a biological entity to remove the benzene from the aqueous solution. Volcanic ash was characterized using FTIR, XRD and FE-SEM-EDAX analyses, revealing key structural features, including sulfoxide functional groups, a crystalline size of 179.06 nm and particle sizes ranging from 36.24 to 234.60 nm. Batch experiments were conducted to optimize adsorption and degradation efficiencies under different conditions. A maximum degradation efficiency of 80.62 % was achieved at a benzene concentration of 10 µg/mL within 1 hr. The efficiency increased to 87.96 % with a higher catalyst dosage at a benzene concentration of 50 µg/mL over 5 hr. Acidic conditions (pH 3) further enhanced the efficiency to 81.43 % over 5 hr. Under sunlight irradiation, a maximum degradation efficiency of 83.54 % was achieved within 1 hr. These findings establish volcanic ash as a promising, eco-friendly material for benzene adsorption in aqueous solutions, with the added advantage of enhancing seed germination and growth parameters. Its abundant availability and cost-effectiveness make it a sustainable solution for environmental remediation and agricultural applications.

Keywords

benzene; degradation; morphology; seed vigour; volcanic ash

Introduction

The escalating human population and burgeoning industries act as a malevolent force, relentlessly degrading the delicate interface where soil and water meet, poisoning the essence of nature. Freshwater resources, once abundant, are now a dwindling treasure, constantly under siege by a relentless barrage of pollutants spewing from factories and farms (1). Among these contaminants, heavy metal ions are responsible, for their acute toxicity and potential to induce cancer and have become a focal point of grave concern.

Burgeoning pollution in the environment has become a matter of health concern which is caused by the release of Polycyclic Aromatic Hydrocarbons (PAHs), such as benzene, naphthalene, anthracene, fluorene, chrysene, toluene and pyrene. PAHs are released from various sources like vehicle emission, incomplete combustion, waste disposal and industrial wastewater that leads to various hazards for plants, animals and humans. Alarming, PAHs are increasing

rapidly which is a major water contaminant. Even a lesser amount accumulates in plants and animals through aquatic food webs which ultimately reach us and they are non-biodegradable (2). In this context, removal of PAHs from water, air and soil has become an essential process for protecting the environment as well as human health. The negative impact of PAHs has been confirmed by several studies (3, 4).

Benzene a type of PAH, is a primary pollutant regulated by the US Environmental Protection Agency (EPA) due to its serious health risks for humans (4). Benzene is a significant concern for environmental regulators, ranking sixth among hazardous substances on the Environmental Protection Agency's (EPA) priority list under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA). This high ranking underscores the EPA's commitment to prioritizing the cleanup of benzene contamination. To remove these PAHs from the environment many long-established methods exist that include solvent extraction, precipitation and various filtration techniques (5, 6). However, these methods often struggle with low-concentration PAH contamination due to high operational costs. This has created a growing need for the search for new, low-cost and locally-sourced adsorbents with high capacities for removing PAHs, particularly even when they are in low concentrations. The effectiveness of such adsorption depends on various factors like solution pH, adsorbent dosage, target pollutant type, surface area, temperature and contact time. This concept has been demonstrated with the help of research work done by (7-10) on the potential of natural adsorbents like zeolites, rice husk ash, kaolinite and volcanic ash for removing benzene from aqueous media. These studies result in finding a promising avenue for developing cost-effective solutions for PAH remediation.

PAHs have low water solubility and high hydrophobicity, leading to significant accumulation in soils where more than 90 % of the global PAH burden is stored (11, 12). The strong affinity of PAHs for soil organic matter and their interaction with meso and macroporous clay colloids contribute to their persistence, with organic matter acting as a binding agent that limits PAH mobility and biodegradability (13, 14). This persistent accumulation poses risks to soil health and crop productivity, particularly in agricultural lands where PAHs can disrupt soil microbial communities and plant growth processes. Maize (*Zea mays* L.) a globally significant crop, serves as a valuable model for studying pollutant impacts due to its high biomass yield, rapid growth and tolerance to abiotic stress (15). However, PAH contamination has been shown to inhibit maize growth and increase pollutant accumulation in plant tissues (16, 17). Additionally, volcanic ash was identified as a growth promoter for maize crops and potentially influencing PAH biodegradation (18). Volcanic materials like clays and zeolites possess high silicon dioxide and aluminium oxide content, which makes them efficient adsorbents (19). Apart from this, their large surface area also endows them with high adsorption ability (20). The volcanic ash from volcanic eruptions encompasses different forms of silicate, augite, magnetite, apatite, biotite, feldspars, horn blend, volcanic glass, quartz and hypersthene. After thorough deposition of volcanic ash, the soil called andosol or volcanic ash soil will be formed which is considered as the most productive soil in the world (21). They are found to have an inherent ability to discard the PAHs

from the troposphere which was confirmed by the estimation of PAHs composition through granulometrically homogeneous fraction.

This study pioneers the use of volcanic ash as a multifunctional material for environmental remediation and agricultural enhancement, distinguishing itself from prior research through its innovative approach and comprehensive scope. While a few previous studies have explored volcanic ash as a soil amendment in certain crops, such as watermelon, sweet potato and lime, limited attention has been given to its potential for addressing benzene contamination and its dual role in promoting crop growth (22-24). Building on this background, we initiated work to thoroughly characterize volcanic ash using advanced techniques such as FT-IR, XRD, FE-SEM and EDAX, optimizing parameters viz., initial benzene concentration, dosage, pH and irradiation for effective benzene removal from aqueous solutions. By integrating volcanic ash in raw and coated forms for maize seed and grain treatments, this work uniquely addresses dual objectives: mitigating PAH contamination and enhancing crop germination and growth. The novel application of volcanic ash coatings and its influence on PAH biodegradation in agricultural contexts bridges gaps between environmental science and sustainable agriculture, offering a low-cost, locally sourced solution to pressing global challenges.

Materials and Methods

Materials

The hybrid maize seeds (COH(M) 8) used in this study were sourced from the Department of Millets, Tamil Nadu Agricultural University, Coimbatore, Tamil Nadu. COH(M) 8 was selected for its widespread cultivation and agronomic importance in Tamil Nadu, India. Also, renowned for its adaptability to diverse environmental conditions and high yield potential. The chemical benzene used in adsorption evaluation was procured from Spectrum Reagents and Chemicals Pvt Ltd, Kerala, India.

Methodology

Seeds and grains of hybrid maize COH(M) 8 were thoroughly washed with tap water to remove impurities. A coating formulation comprised of inert polymer and volcanic ash in a 1:1 ratio was applied to the seeds and grains at a rate of 10 mL/kg. This ratio ensures uniform adhesion of volcanic ash to seeds and grains while exposing sufficient active sites for benzene adsorption. Additionally, the ratio maintains a manageable viscosity for consistent application and was validated through preliminary tests to achieve optimal performance in both germination and adsorption studies. These coated samples were used for germination and batch experiments. The experimental design included the following treatment groups: T₁ (Control), T₂ (Coated seed before benzene adsorption), T₃ (Coated grain before benzene adsorption) and T4-T8 (Coated seed with varying benzene concentrations of 10, 20, 30, 40 and 50 µg/mL respectively). Apart from this, the raw volcanic ash was also used for conducting the batch study.

Physiological parameters

The physiological parameters were determined by the following equations.

Germination percentage =

$$\frac{\text{Total count of normal seedlings}}{\text{Number of sown seeds}} \times 100 \quad (\text{Eqn.1})$$

The germination percentage was calculated as per protocols (13).

Seedling length was measured by adding the root and shoot length together.

Seedling length (cm) = Root length + Shoot length (cm) (Eqn.2)

Seedling vigour was calculated according to the method of (14).

Vigour index I = G (%) x SL + RL (cm) (Eqn.3)

Vigour index II = G (%) x DMP mg/10 (Eqn.4)

Dry matter production of seedlings (mg/ 10 seedlings)

Seedlings were first shade-dried for 24 hr to remove surface moisture and then transferred to a hot air oven which was maintained at a temperature of $85 \pm 2^\circ\text{C}$ for another 24 hr to ensure complete drying. Then seedlings were cooled for 30 min in a desiccator with silica gel to prevent reabsorption of moisture from the environment. Each seedling was measured for dry weight in a weighing balance (Shimadzu AU220) and the result was expressed in milligrams per 10 seedlings (mg/ 10 seedlings).

Characterization

The structural and optical properties of volcanic ash were characterized using various analytical techniques viz., Fourier Transform Infrared Spectroscopy analysis (FTIR), Field Emission Scanning Electron Microscopy analysis (FE-SEM), Energy Dispersive X-ray Analysis (EDAX) and X-ray Diffraction analysis (XRD). FTIR analysis was performed using the FTIR-6800 Type A spectrometer, operating in the range of $4000\text{--}400\text{ cm}^{-1}$ with a resolution of 4 cm^{-1} . The spectrometer was calibrated using a polystyrene film to ensure precision in peak identification and intensity measurements. Background spectra were collected before each sample analysis to reduce noise and enhance measurement accuracy. XRD analysis was conducted using a spectrophotometer equipped with a copper $\text{K}\alpha$ radiation source ($\lambda = 1.5406\text{ \AA}$) at an operating voltage of 40 kV and a current of 30 mA. The XRD system was calibrated with a standard silicon sample to confirm angular accuracy and correct peak positioning. The average crystallite size was calculated using the Debye-Scherrer equation based on the full width at half maximum of the XRD peaks. Morphological and structural analyses were performed using the Quanta 250 FEG-SEM, operated at an accelerating voltage of 20 kV. Samples were sputter-coated with a thin gold layer ($\sim 10\text{ nm}$) to improve conductivity and image resolution. Elemental composition was determined using an integrated EDAX system calibrated with a cobalt standard to ensure spectral accuracy. The EDAX data provided detailed insights into the elemental composition and purity of the volcanic ash samples.

Batch adsorption

In batch adsorption experiments, stock solutions of benzene were prepared using analytical-grade reagents to achieve

precise initial concentrations. Serial dilutions were carried out to obtain the desired concentration levels (10, 20, 30, 40 and $50\text{ }\mu\text{g/mL}$). All solutions were prepared freshly and handled under controlled conditions to prevent evaporation or contamination. The pH of the solutions was adjusted using 0.1 M HCl or 0.1 M NaOH solutions and monitored with a calibrated digital pH meter. pH adjustments were verified immediately before each experiment to ensure consistency. Light exposure was regulated using a controlled irradiation system equipped with a UV-visible light source. The duration and intensity of irradiation were standardized across all experiments, with a lux meter used to measure and confirm light intensity. Batch adsorption experiments were conducted under controlled conditions at a constant room temperature of $25 \pm 2^\circ\text{C}$. The samples were placed on a mechanical shaker set at a consistent speed to ensure uniform mixing and optimal contact between the volcanic ash and benzene in the solution. The effects of benzene concentration, dosage, pH and irradiation were systematically studied by following protocols. Equipment was regularly calibrated and standard operating procedures were strictly followed to ensure reproducibility across trials.

Concentration of benzene

Batch experiments were conducted at room temperature to assess the adsorption capacity of benzene up to the contact time of 5 hr. The observation was taken at 1 hr intervals. The photocatalytic degradation efficiency of volcanic ash was done against benzene as a pollutant found in water. The photocatalytic degradation of benzene was done with an initial concentration of volcanic ash, chosen as $200\text{ }\mu\text{g/mL}$, 10 to $50\text{ }\mu\text{g/mL}$ of catalyst. Whereas, the volcanic ash-coated seeds and grains of maize were placed in benzene (adsorbate) prepared at the rate of 0.752 g/L . To further investigate the degradation process, the solution was analyzed with the help of UV-Vis spectrophotometry. The measurement identified a maximum absorption wavelength (λ_{max}) at 227 nm.

% of degradation =

$$\frac{\text{Initial benzene conc.} - \text{Final benzene conc.}}{\text{Initial benzene conc.}} \times 100$$

Effect of Dose

To assess the dose effect on the adsorption of coated seeds and grains, a series of benzene solutions was prepared at 10, 20, 30, 40 and $50\text{ }\mu\text{g/mL}$ concentration and 1 (0.376 g/L), 2 (0.752 g/L), 3 (1.128 g/L), 4 (1.504 g/L) and 5 (1.880 g/L) number of seeds were placed in the solution respectively. As far as volcanic ash is concerned, 100 to $500\text{ }\mu\text{g/mL}$ was taken and the same above-mentioned procedure was followed.

Effect of pH

To assess the pH effect on the adsorption capacity of coated seeds, coated grains and raw volcanic ash, different pHs of the solution was prepared viz., 3, 5, 7, 9 and 12. Among the different concentrations of benzene, $20\text{ }\mu\text{g/mL}$ was taken and 2 seeds and grains of maize were placed in all pH solutions. $200\text{ }\mu\text{g/mL}$ of volcanic ash, was taken for the experiment and poured into $20\text{ }\mu\text{g/mL}$ of benzene solution.

Effect of irradiation

To assess the irradiation source effect on coated seeds and coated grains, 20 µg/mL of benzene was prepared and 2 seeds and grains of maize were placed in it. Two sets containing each 5 samples were placed under both sunlight and UV light and the readings were taken at 1 hr interval in UV-spectrophotometer. For volcanic ash, 200 µg/mL was added to 20 µg/mL of benzene and the experiment was carried out.

Statistical analysis

The experimental data for physiological parameters and batch experiments were recorded in triplicate to ensure the accuracy and reproducibility of the results. Statistical analyses, including ANOVA and standard error calculations, were performed using SPSS software. Percentage data such as germination rates and degradation efficiency were subjected to arcsine transformation to improve normality for statistical testing. Results are presented as mean ± standard error (SE), with significance determined at $p \leq 0.05$.

Results and Discussion

Physiological parameters

The results demonstrated significant differences in physiological performance among the treatments, validated through ANOVA. Coated seeds (T_2) exhibited significantly higher germination rates (92 %) compared to the control (T_1 : 86 %) and showed enhanced root length (25.6 cm vs. 20.4 cm), shoot length (18.7 cm vs. 15.3 cm) and vigour indices (I: 3898, II: 133 vs. I: 2713, II: 94). This improvement is attributed to the water retention capacity and nutrient enhancement from volcanic ash. However, treatments with increasing benzene concentrations (T_4 - T_8) showed a gradual decline in all physiological parameters, with T_8 (50 µg mL⁻¹ benzene) showing the lowest germination rate (20 %) and vigour indices

(I: 368, II: 8). Coated grains (T_3) failed to germinate due to the loss of viability during prolonged storability, confirming that volcanic ash's beneficial effects are contingent on seed viability. The results revealed that increased physiological parameters in coated seeds of maize were due to absorption and utilization of SiO₂ present in the volcanic ash and also due to porosity in ash which retains water than control (26 -28) (Table 1, Fig. 1A & B).

The silica (SiO₂) present in volcanic ash is absorbed by seeds, contributing to the structural reinforcement of cell walls and enhancing resistance to abiotic stress. Silica also facilitates improved nutrient uptake, strengthens antioxidant defense mechanisms and supports hormonal balance, collectively stimulating root and shoot growth and increasing dry matter accumulation (22, 23, 29, 30). These factors contribute to the enhanced vigour indices observed in volcanic ash-coated seeds. Additionally, volcanic ash's strong adsorption properties may reduce the bioavailability of toxic substances like benzene, mitigating their inhibitory effects on cellular processes and hormonal pathways. Increased concentrations of PAHs with high molecular weight, such as benzene, are known to inhibit plant growth, as observed in tomatoes (31), due to hormonal imbalances and disruption of cellular structures. While direct studies on the degradation efficiency of benzene using volcanic ash are limited, research on the adsorption properties of volcanic ash has shown its interaction with various organic compounds. For example, humic acids in volcanic ash soils have been found to contain benzene di- and tricarboxylic acids interconnected by biphenyl linkages, suggesting potential interactions with benzene-like compounds (32). Furthermore, the high surface area and porosity of fine volcanic ash particles, as characterized in previous studies, highlight their ability to adsorb water and other small organic molecules (33). These properties underscore the dual role of volcanic ash as both a nutrient-

Table 1. Influence of volcanic ash coating on physiological performance of maize

Treatments	Germination (%)	Root length (cm)	Shoot length (cm)	DMP (g seedlings ⁻¹⁰)	Vigour index I	Vigour index II
T_1	86 ± 1.49 ^b	20.4 ± 0.35 ^c	15.3 ± 0.27 ^c	1.24 ± 0.02 ^c	2713 ± 46.99 ^c	94 ± 1.63 ^c
T_2	92 ± 1.06 ^a	25.6 ± 0.30 ^a	18.7 ± 0.22 ^a	1.52 ± 0.02 ^a	3898 ± 45.01 ^a	133 ± 1.54 ^a
T_3	0 ± 0.00 ^g	0 ± 0.00 ^h	0 ± 0.00 ^h	0 ± 0.00 ^h	0 ± 0.00 ^h	0 ± 0.00 ^h
T_4	88 ± 1.34 ^b	22.3 ± 0.59 ^b	16.1 ± 0.25 ^b	1.29 ± 0.02 ^b	3379 ± 51.62 ^b	113 ± 1.73 ^b
T_5	70 ± 1.46 ^c	17.3 ± 0.62 ^d	12.4 ± 0.26 ^d	1.10 ± 0.02 ^d	2079 ± 43.28 ^d	77 ± 1.60 ^d
T_6	43 ± 0.74 ^d	15.3 ± 0.46 ^e	10.5 ± 0.18 ^e	0.97 ± 0.02 ^e	1109 ± 19.21 ^e	41 ± 0.71 ^e
T_7	27 ± 0.41 ^e	12.5 ± 0.33 ^f	8.0 ± 0.12 ^f	0.52 ± 0.01 ^f	553 ± 8.45 ^f	14 ± 0.21 ^f
T_8	20 ± 0.42 ^f	11.0 ± 0.40 ^g	7.4 ± 0.15 ^g	0.39 ± 0.01 ^g	368 ± 7.66 ^g	± 0.17 ^g

T_1 - Control; T_2 - Coated seed (Before benzene adsorption); T_3 - Coated grain (Before benzene adsorption); T_4 - Coated seed (Benzene conc. 10 µg mL⁻¹); T_5 - Coated seed (Benzene conc. 20 µg mL⁻¹); T_6 - Coated seed (Benzene conc. 30 µg mL⁻¹); T_7 - Coated seed (Benzene conc. 40 µg mL⁻¹); T_8 - Coated seed (Benzene conc. 50 µg mL⁻¹)



Fig. 1. A) Seedlings from the uncoated maize control (T_1); B) Seedlings from the volcanic ash coated seeds of maize (T_2).

enhancing and contaminant-adsorbing material.

Characterization

FTIR analysis

To elucidating the functional group composition of the volcanic ash, FTIR spectroscopy was employed. The analysis yielded characteristic absorption bands at 457 cm^{-1} , 693 cm^{-1} and 793 cm^{-1} consistent with Si-O-Fe bond vibrations as reported by (34, 35). The main band related to strong appearance, silicon oxide/ aluminum oxide stretching bond caused by the presence of sulfoxide/alumino-silicate framework is located around 1045 cm^{-1} (36, 37). The bands at 2166 cm^{-1} might correspond to S-C≡N stretching bonds due to the occurrence of thiocyanate compounds (38). Table 2 details the functional groups identified in the volcanic ash.

XRD analysis

In the study of volcanic ash, identifying the crystallinity index is a crucial parameter. It quantifies the relative amount of crystalline (ordered) regions compared to the amorphous (less ordered) regions within the cellulose structure (39). The XRD pattern of volcanic ash exhibited peaks at $2\theta = 21.0^\circ$, 26.8° , 36.7° , 50.3° and 60.0° . These sharp peaks revealed the crystalline nature of volcanic ash (40). The XRD deconvolution method was used to determine the crystallinity index which was 37.20 % (Table 3). The Scherrer formula was used to calculate the average crystallite size of volcanic ash (179.06 nm).

Table 2. Functional group composition of volcanic ash

Functional group	Volcanic ash bands (cm^{-1})	Reference
S=O stretching	457	(35)
C=C bending Disubstituted	693	(34)
C-H bending 1,2,3-trisubstituted	793	(64)
S=O stretching Sulfoxide	1045	(37)
N=C=S stretching Isothiocyanate	2030	(63)
S-C≡N stretching Thiocyanate	2166	(38)

Table 3. Crystallinity index and crystallite size of volcanic ash

Sample	Total area of all peaks	Total area of all crystalline peaks	Crystallinity index (%)	Crystallite size (nm)
Volcanic Ash	4368.74	1623.95	37.20	179.06

FE-SEM and EDAX analysis

The surface morphology and average particle size of volcanic ash were investigated by using field emission scanning electron microscope analysis. FE-SEM analysis revealed that volcanic ash particles possess a wide range of sizes and complex shapes (41, 42). The images in Fig. 2 (at various magnifications) illustrate this heterogeneity, showcasing both small aggregates and irregularly shaped fragments. Particle sizes ranged from 36.24 to 234.60 nm, confirming the nano/micro-sized nature of the ash. The elemental analysis was carried out using EDAX analysis. The atomic and weight % of

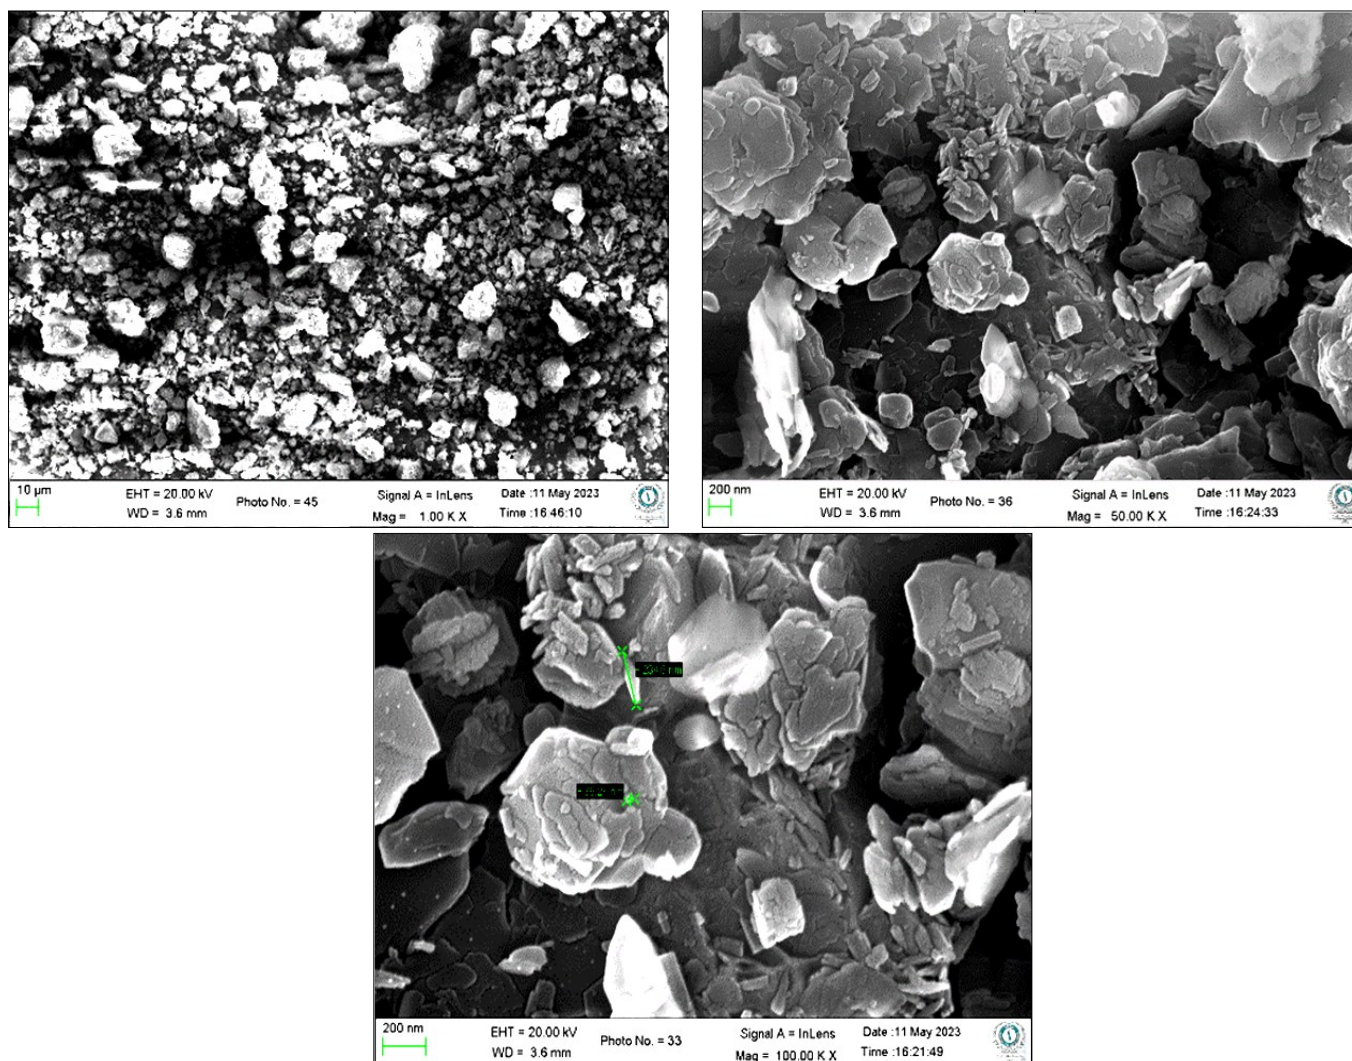


Fig. 2. FE-SEM images of volcanic ash.

Table 4. Elements of volcanic ash by FE-SEM

Elements	Weight%	Atomic%
O K	57.31	71.44
Mg K	3.54	2.90
Al K	4.90	3.62
Si K	25.76	18.29
K K	1.05	0.54
Ca K	3.74	1.86
Ti K	0.38	0.16
Fe K	3.33	1.19
Total	100.00	

volcanic ash is given in Table 4. Volcanic ash contains high silicon dioxide followed by aluminium oxide same (43).

Destruction of benzene

At present, the adsorption process is identified as a cost-effective and widely accepted method to eliminate PAHs from the environment. In this study, to examine the destruction performance of volcanic ash against benzene molecules in water, the reactions were done with parameters such as different benzene concentrations, different reaction medium's pH, different catalyst doses of volcanic ash and external irradiation sources. The perfect reaction condition has been chosen by doing the experiments mentioned above.

Impact on the concentration of benzene

To determine the effect of benzene concentration (adsorbate), different concentrations of benzene varied from 10 to 50 µg/mL were prepared. Volcanic ash at 0.756 g/L (adsorbent) was used for raw volcanic ash, volcanic ash-coated seeds and grains of maize. The findings of the study revealed that the maximum degradation efficiency was found to be 45.72 % for 50 µg/mL at 1 hr followed by 43.23 % for 40 µg/mL at 1 hr and a minimum degradation efficiency of 7.93 % was recorded while using 10 µg/mL at 5 hr for raw volcanic ash (Fig. 3A). Same as that of volcanic ash-coated seeds and grains expressed maximum degradation efficiency that was found to be 70.09 %, 66.83 % and 65.74 %, 62.06 % for 50 µg/mL and 40 µg/mL at 1 hr respectively. Whereas, minimum degradation efficiency was obtained at 19.08 % and 12.41 % for volcanic ash-coated seeds and grains of maize respectively while using 10 µg/mL at 5 hr (Fig. 3B & 3C). The maximum degradation efficiency of benzene was attained at a higher concentration (50 µg/mL) than lower concentration (10 µg/mL). This behaviour may be attributed to an enhanced driving force for mass transfer through the liquid film, accompanied by an increased rate of adsorption. Consequently, the adsorbent reached saturation rapidly. These results were supported by (44-46). The entire three samples showed that maximum degradation of benzene was done in 1 hr rather than increased duration that reduced the degradation efficiency because it attained saturation point between adsorbate (benzene) and adsorbent (volcanic ash).

Volcanic ash demonstrates several advantages over other natural adsorbents in environmental remediation applications. Unlike zeolites, which often require synthetic activation or modification to enhance their adsorption

capacity and biochar which although effective due to its porous structure, involves energy-intensive pyrolysis that increases its environmental footprint (47, 48). Volcanic ash is readily usable in its raw form, making it a more cost-effective and environmentally friendly option. The high degradation efficiencies observed in this study (up to 70.09 % for benzene at 50 µg/mL) demonstrate that volcanic ash can achieve superior performance under optimal conditions.

Impact of catalyst dosage

To determine the economic effectiveness of the process, an adequate dose of the catalyst must be investigated. The study was done by using five different benzene concentrations viz., 10, 20, 30, 40 and 50 µg/mL, five different raw volcanic ash (adsorbent) ranges viz., 100, 200, 300, 400 and 500 µg/mL, number of seeds and grains of volcanic ash-coated maize viz., 1 (0.376 g/L), 2 (0.752 g/L), 3 (1.128 g/L), 4 (1.504 g/L), 5 (1.880 g/L) and contact time ranged from 1 hr, 2hr, 3 hr, 4 hr and 5 hr. Nevertheless, the maximum concentration of 50 µg/mL for 1 hr of benzene has exhibited higher degradation efficiency up to 62.26 % and the destruction efficiency was reduced to 13.31 % for 10 µg/mL at 5 hr for raw volcanic ash (Fig. 4A). As a result, for the volcanic ash-coated seeds and grains of maize, the degradation of benzene was high at maximum concentration of 50 µg/mL for 1 hr with increased adsorbent dose (89.32 % and 80.62 %, respectively) (Fig. 4B and C). These results were supported by an earlier study (49). The amount of benzene adsorbed (degradation efficiency) by volcanic ash-coated seed and maize grains increased with the dosage. A higher adsorbent dosage leads to an increased number of active sites available for the solute (benzene) to adsorb, thereby enhancing the adsorption rate. These evidence was supported by the authors (50, 51).

Impact of pH of reaction mixture

The pH of the solution is an important component in the photocatalytic destruction reaction and it can influence the pollutant's adsorption on the surface of the catalyst. The destruction of the benzene molecule was examined with five different pH of the reaction mixture i.e. 3, 5, 7, 9 and 12 fixed initial benzene concentration of 10 µg/mL, fixed adsorbent (volcanic ash) 0.756 g/L and contact time of 5 hrs. The maximum degradation efficiency of benzene with a lower pH of 3 is 65.0 % at 5 hr and the minimum degradation efficiency at higher pH of 12 is 11.13 % at 1 hr for volcanic ash (Fig. 5A). Volcanic ash-coated grains and seeds of maize exhibited the maximum degradation efficiency at lower pH of 3 recorded 81.43 % and 88.10 % at 5 hr, respectively whereas minimum degradation efficiency was noted at higher pH of 12, 16.07 % and 29.77 % at 1 hr respectively (Fig. 5B & C). The acidic pH (lower pH) results observed in the maximum benzene degradation process can be attributed to the following factors: 1) The reduction in pH levels contributes to a lower rate of electron and proton recombination while increasing the rate of oxidation reactions facilitated by protons on the catalyst. 2) The higher concentration of H⁺ at lower pH values promotes the conversion of O₂⁻ and hydrogen peroxide to hydroxyl radicals (OH), facilitating the degradation process. The results of the present findings, clearly show that maximum degradation efficiency was high at lower pH (acidic) when pH

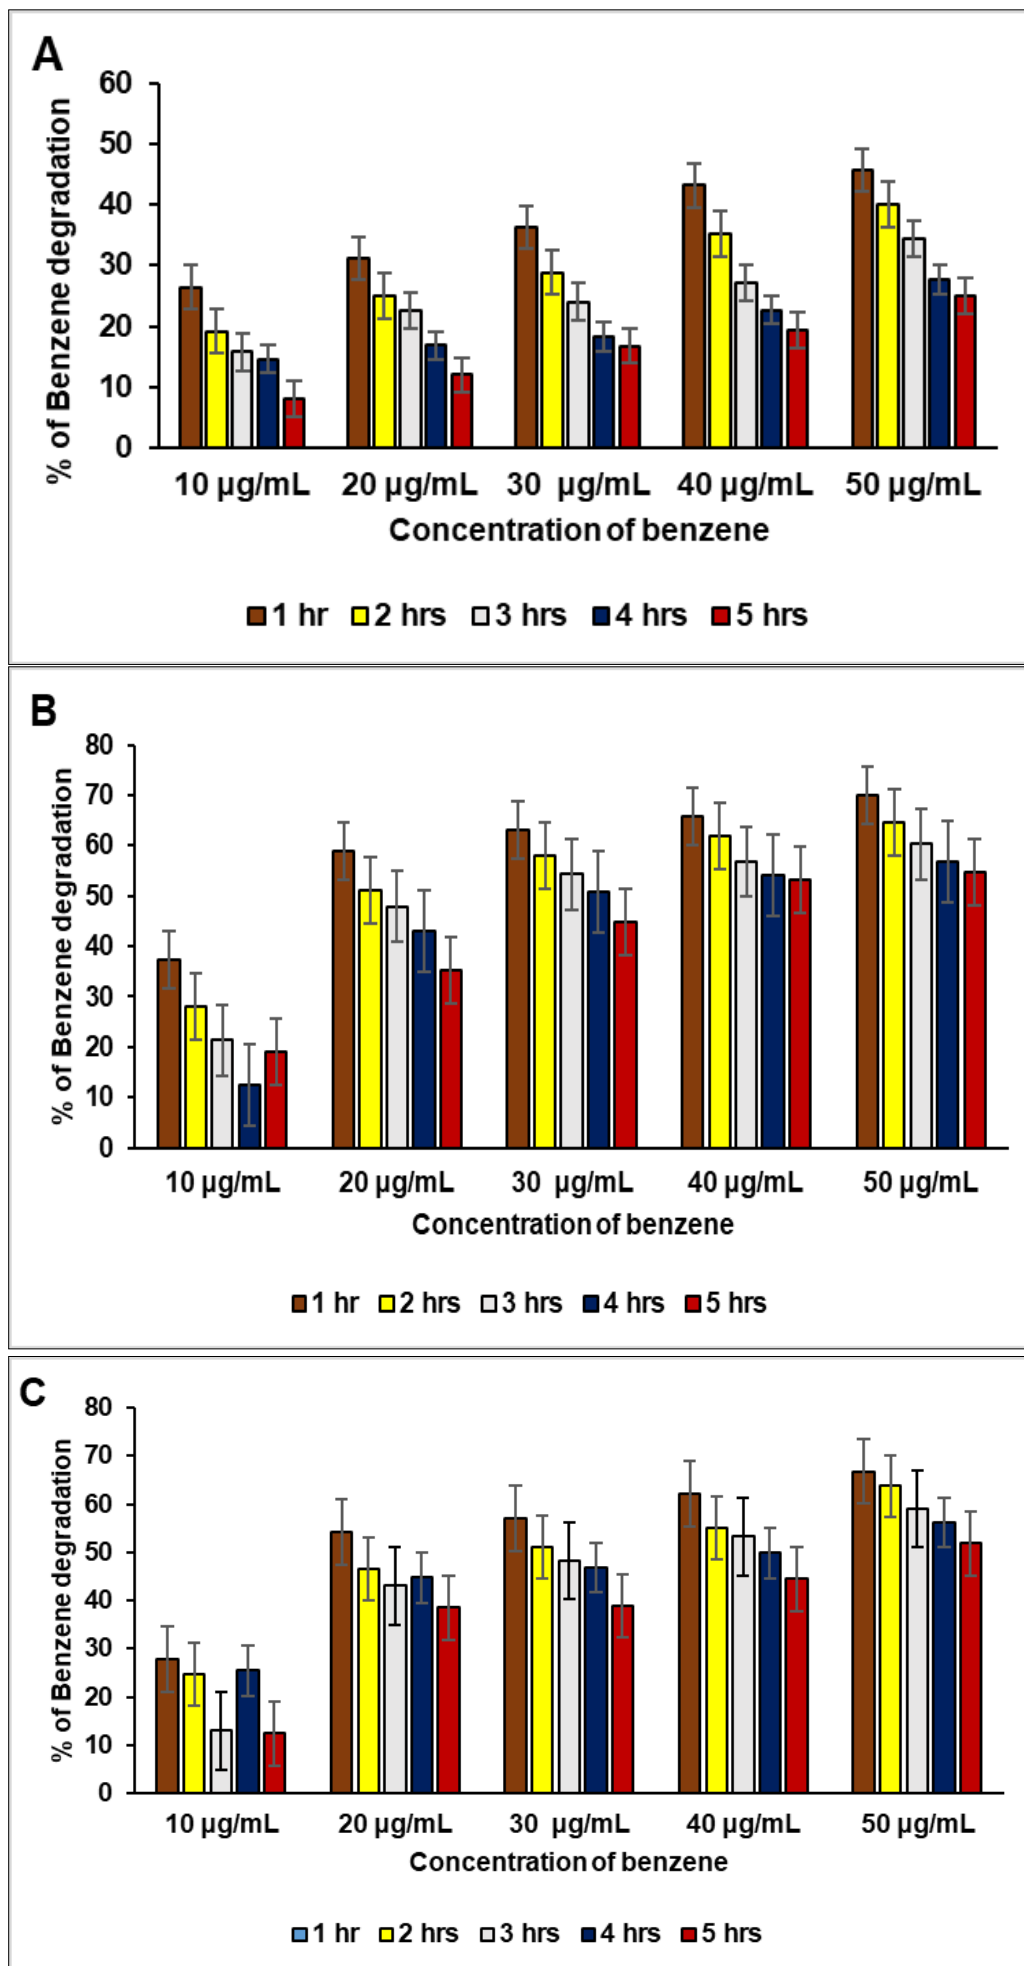


Fig. 3. A) Impact of benzene concentration on volcanic ash; B) Coated seeds of maize and C) Coated grains of maize.

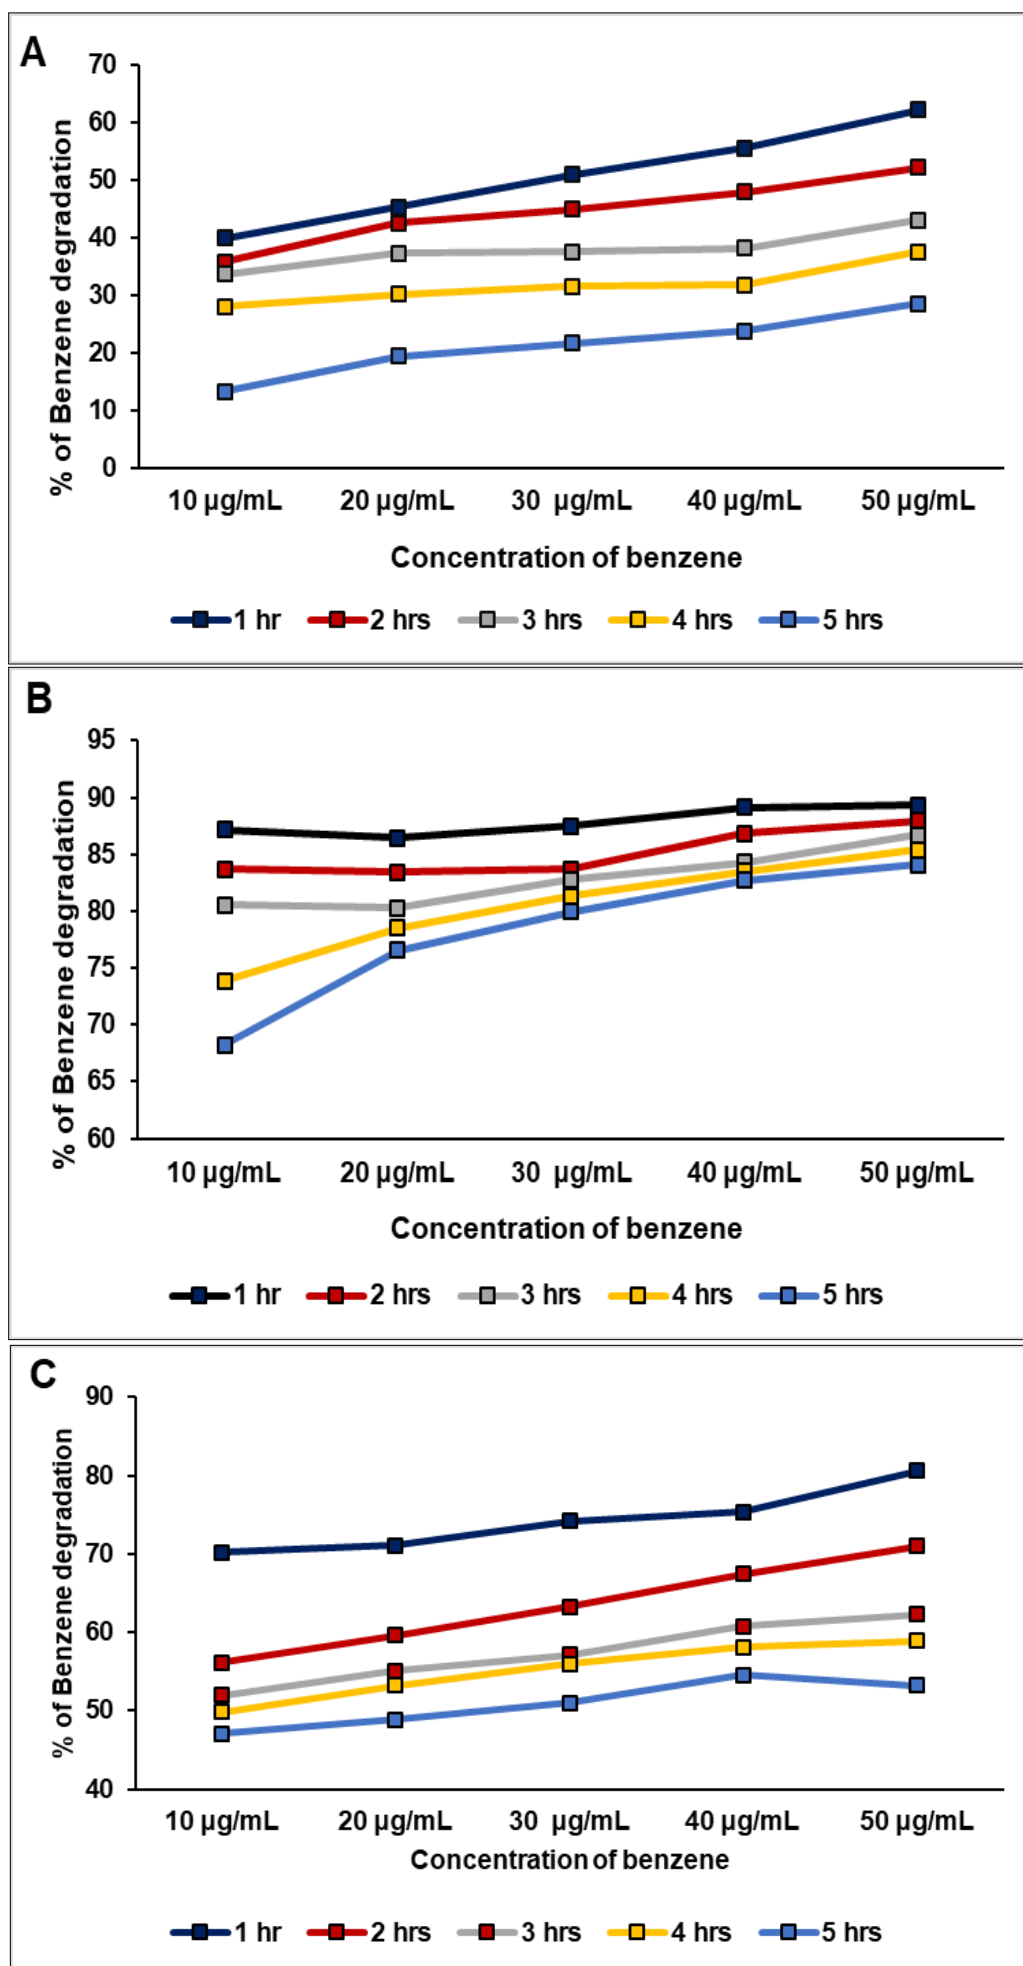


Fig. 4. A) Impact of dose on volcanic ash; B) Coated seeds of maize and C) Coated grains of maize.

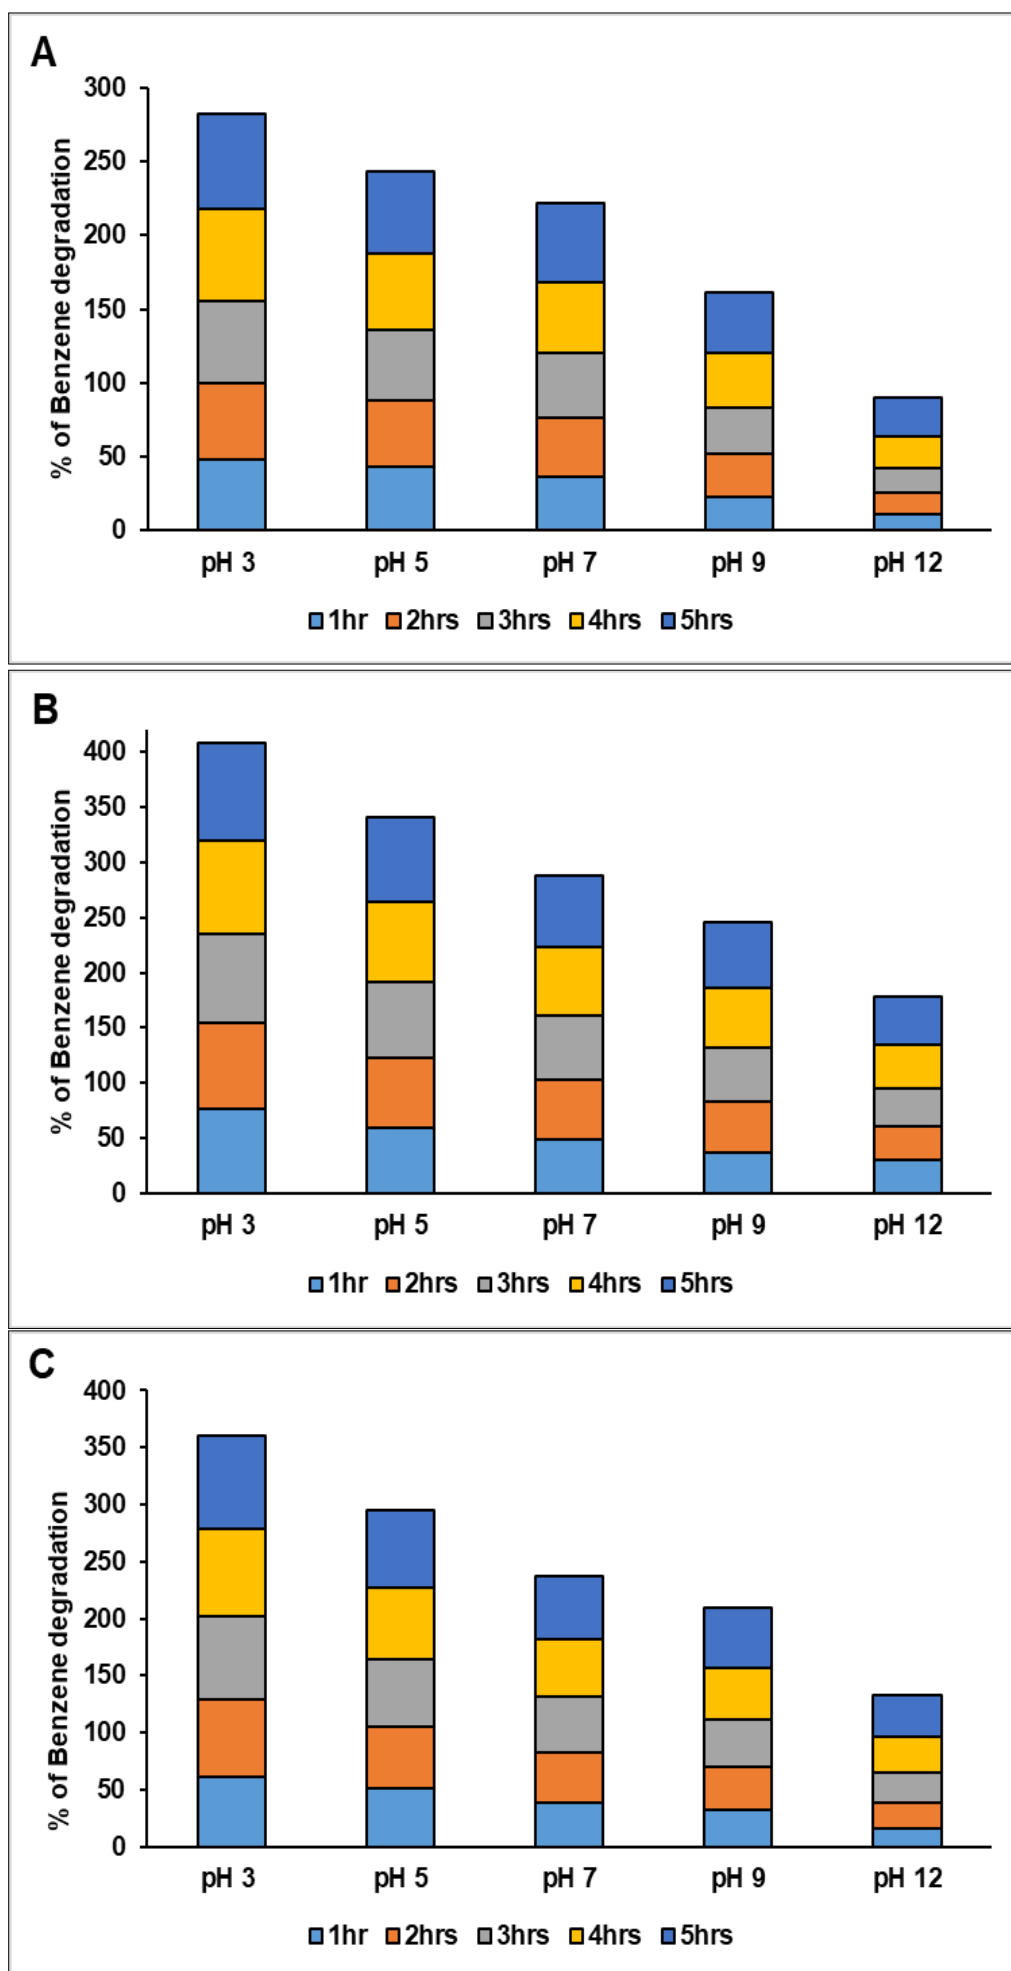


Fig. 5. A) Impact of pH on volcanic ash; B) Coated seeds of maize and C) Coated grains of maize.

(basic) increased the degradation efficiency got reduced (45, 52-54).

Impact on irradiation source

The irradiation source is an important parameter in the destruction of benzene as the wavelength and intensity of the light source are different from one another. To investigate the effect of the irradiation source, the benzene concentration was fixed as 10 µg/mL, fixed volcanic ash (adsorbent) as 0.756 g/L and contact time up to 5 hr. In raw volcanic ash, maximum degradation efficiency was measured to be 83.86 % and 73.13 % at 1 hr for sunlight and UV light irradiation, respectively (Fig. 6A). For volcanic ash-coated seeds of maize, the results

revealed that maximum degradation efficiency of 83.54 % and 78.27 % at 1hr for sunlight and UV light (Fig. 6B) whereas, same as that volcanic ash-coated grains of maize also expressed same trend and the maximum degradation was observed at 83.26 % and 76.88 % at 1 hr (Fig. 6C). Sunlight irradiation triggered a rise in photon flux, which in turn facilitated the production of hydroxyl radicals. In addition, the maximum degradation efficiency of benzene was attained within 1 hr because the saturation point was attained between the adsorbent and adsorbate (55). The abundance of hydroxyl radicals promotes the adsorption of pollutant molecules onto the active sites of the photocatalyst, thereby enhancing their degradation (56). The observed results showed that the

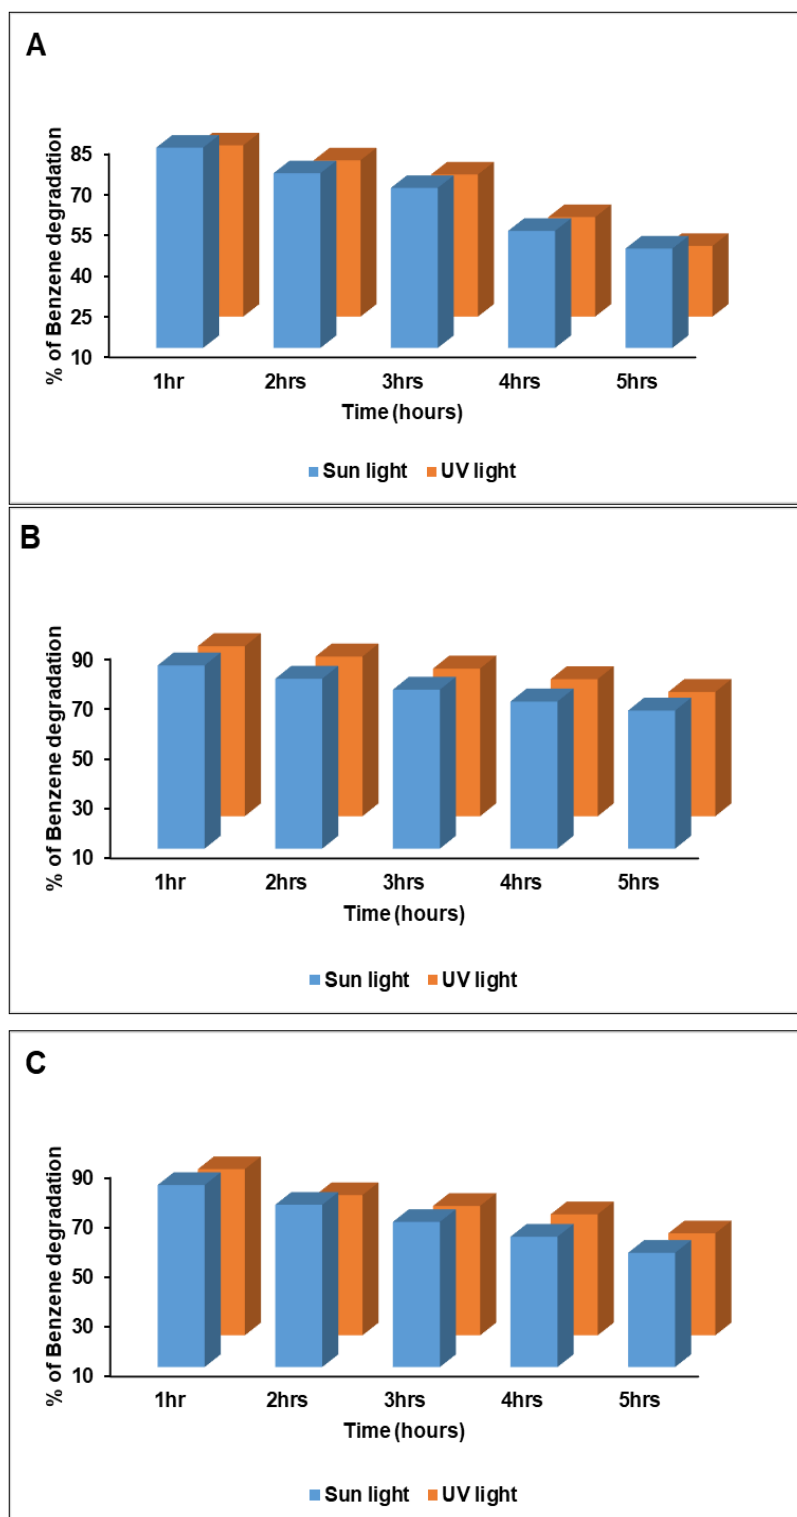


Fig. 6. (A) Impact on Irradiation source in volcanic ash; (B) Coated seeds of maize and (C) Coated grains of maize.

maximum degradation efficiency of benzene was attained by the sunlight source than the light source obtained from UV (57).

Volcanic ash is a naturally abundant material in regions with volcanic activity and offers a cost-effective alternative to synthetic agricultural inputs (58). Its widespread availability minimizes logistics costs and enhances accessibility. Volcanic ash enriches soil fertility by supplying essential minerals such as silicon, potassium and calcium, which are vital for plant growth. Its dual role as a soil conditioner and pollutant adsorbent underscores its agricultural utility (33, 59-60). Seed coatings with volcanic ash have demonstrated improved germination rates, enhanced chlorophyll content and increased stress tolerance, as shown by elevated proline levels and antioxidant enzyme activity under abiotic stress (61, 62). Scaling up these benefits could enhance crop yield and resilience to abiotic stress. Additionally, volcanic ash has excellent adsorptive properties due to its high specific surface area and porous structure, which can effectively capture benzene and other volatile organic compounds (28, 33). It is compatible with existing agricultural technologies, such as soil amendment, seed-coating and foliar applications, facilitating its adoption without requiring major adjustments to current practices. By reducing reliance on chemical fertilizers and mitigating environmental pollutants, volcanic ash aligns with sustainable agricultural goals and promotes eco-friendly farming systems.

Conclusion

The study highlights the potential of volcanic ash as a cost-effective and eco-friendly material for environmental remediation and agricultural enhancement. It demonstrates higher benzene degradation in volcanic ash-coated seeds compared to grains, attributed to the living nature of seeds with active enzymes, metabolic pathways and strong membrane integrity, which enhance benzene absorption. Volcanic ash also improves the physiological parameters of maize, supporting plant growth and development. However, its long-term environmental impact warrants further investigation to ensure sustainability. Studies on the persistence, mobility and accumulation of volcanic ash residues in soil are essential to assess ecological safety. Its proven ability to adsorb benzene suggests the potential for broader applications in mitigating pollutants such as heavy metals and PAHs. Future research should explore its efficacy across diverse crops and agro-climatic conditions, assess cumulative effects on soil health and evaluate scalability. Combining volcanic ash with other materials could enhance its properties, while environmental risk assessments focusing on soil microorganism interactions would validate its sustainable use.

Acknowledgements

The authors acknowledge the Department of Seed Science and Technology for providing the facilities to carry out the research. This work was funded by the M/s Plasil Organics, Hyderabad.

Authors' contributions

KN conducted the experiment and collected the all data. RJ carried out the correction and finalization of the paper. VM did the facilitation and guidance for laboratory experiments while MD helped in planning the research work. TE guided in data compilation and analysis. WV and SK guided in characterisation work. All authors read and approved the final manuscript.

Compliance with ethical standards

Conflict of interest: Authors do not have any conflict of interests to declare.

Ethical issues: None

References

- Mushtaq N, Singh DV, Bhat RA, Dervash MA, Hameed OB. Freshwater contamination: sources and hazards to aquatic biota. *Fresh Water Pollution Dynamics and Remediation*. 2020;27-50. https://doi.org/10.1007/978-981-13-8277-2_3
- Patel AB, Shaikh S, Jain KR, Desai C, Madamwar D. Polycyclic aromatic hydrocarbons: sources, toxicity and remediation approaches. *Front Microbiol*. 2020;11:562813. <https://doi.org/10.3389/fmicb.2020.562813>
- Juretic D, Kusic H, Koprivanac N, Loncaric-Bozic A. Photooxidation of benzene-structured compounds: Influence of substituent type on degradation kinetic and sum water parameters. *Water Res*. 2012;46(9):3074-84. <https://doi.org/10.1016/j.watres.2012.03.014>
- Mathur AK, Majumder CB, Chatterjee S. Combined removal of BTEX in air stream by using mixture of sugar cane bagasse, compost and GAC as biofilter media. *J Hazard Mater*. 2007;148(1-2):64-74. <https://doi.org/10.1016/j.jhazmat.2007.02.030>
- Gupta VK, Jain CK, Ali I, Sharma M, Saini VK. Removal of cadmium and nickel from wastewater using bagasse fly ash-a sugar industry waste. *Water Res*. 2003;37:4038-44. [https://doi.org/10.1016/S0043-1354\(03\)00292-6](https://doi.org/10.1016/S0043-1354(03)00292-6)
- Changsuphan A, Wahab MIB, Kim ONT. Removal of benzene by ZnO nanoparticles coated on porous adsorbents in the presence of ozone and UV. *Chem Eng J*. 2012;18:215-21. <https://doi.org/10.1016/j.cej.2011.11.064>
- Daifullah AAM, Girgis BS. Impact of surface characteristics of activated carbon on adsorption of BTEX. *Colloids Surf A Physicochem Eng Asp*. 2003;214(1-3):181-93. [https://doi.org/10.1016/S0927-7757\(02\)00392-8](https://doi.org/10.1016/S0927-7757(02)00392-8)
- Babel S, Kurniawan TA. Low-cost adsorbents for heavy metals uptake from contaminated water: a review. *J Hazard Mater*. 2003;97(1-3):219-43. [https://doi.org/10.1016/S0304-3894\(02\)00263-7](https://doi.org/10.1016/S0304-3894(02)00263-7)
- Khorzughy SH, Eslamkish T, Ardejani FD, Heydartaemeh MR. Cadmium removal from aqueous solutions by pumice and nano-pumice. *Kor J Chem Eng*. 2015;32:88-96. <https://doi.org/10.1007/s11814-014-0168-2>
- Amin MA, Bina B, Majd AMS, Pourzamani H. Benzene removal by nano magnetic particles under continuous condition from aqueous solutions. *Front Environ Sci Eng*. 2013;8(3):345-56. <https://doi.org/10.1007/s11783-013-0574-4>
- Wild SR, Jones KC. Polynuclear aromatic hydrocarbons in the United Kingdom environment: a preliminary source inventory and budget. *Environ pollut*. 1995;88(1):91-108. [https://doi.org/10.1016/0269-7491\(95\)91052-M](https://doi.org/10.1016/0269-7491(95)91052-M)
- Posada-Baquero R, Martín ML, Ortega-Calvo JJ. Implementing standardized desorption extraction into bioavailability-oriented bioremediation of PAH-polluted soils. *Sci Total Environ*. 2019;696:134011. <https://doi.org/10.1016/j.scitotenv.2019.134011>

13. Cho SH, Kim KH, Jeon YJ, Kwon EE. Pyrolysis of microalgal biomass in carbon dioxide environment. *Bioresour Technol.* 2015; 193:185–91. <https://doi.org/10.1016/j.biortech.2015.06.119>
14. Luo L, Lin S, Huang H, Zhang S. Relationships between aging of PAHs and soil properties. *Environ Pollut.* 2012;170:177–82. <https://doi.org/10.1016/j.envpol.2012.07.003>
15. Abdelgawad H, Zinta G, Hamed BA, Selim S, Beemster G, Hozzein WN. Maize roots and shoots show distinct profiles of oxidative stress and antioxidant defense under heavy metal toxicity. *Environ Pollut.* 2020;258:113705. <https://doi.org/10.1016/j.envpol.2019.113705>
16. Lin Q, Shen KL, Zhao HM, Li WH. Growth response of *Zea mays* L. in pyrene-copper co-contaminated soil and the fate of pollutants. *J Hazard Mater.* 2008;150:515–21. <https://doi.org/10.1016/j.jhazmat.2007.04.132>
17. Houshani M, Salehi-Lisar SY, Motafakkerazad R, Movafeghi A. Uptake and distribution of phenanthrene and pyrene in roots and shoots of maize (*Zea mays* L.). *Environ Sci pollut Res.* 2019;26:9938–44. <https://doi.org/10.1007/s11356-019-04371-3>
18. Wang Y, Li M, Liu Z, Zhao J, Chen Y. Interactions between pyrene and heavy metals and their fates in a soil-maize (*Zea mays* L.) system: Perspectives from the root physiological functions and rhizosphere microbial community. *Environ. pollut.* 2021;287:117616. <https://doi.org/10.1016/j.envpol.2021.117616>
19. KithinjiKinoti I, Ogunah J, MuturiaM'Thiruaine C, Marangu JM. Adsorption of heavy metals in contaminated water using zeolite derived from agro-wastes and clays: a review. *J Chem.* 2022;4250299. <https://doi.org/10.1155/2022/4250299>
20. Alraddadi S. Utilization of nano volcanic ash as a natural economical adsorbent for removing cadmium from wastewater. *Heliyon.* 2022;8(12):e12460. <https://doi.org/10.1016/j.heliyon.2022.e12460>
21. Nanzyo M. Unique properties of volcanic ash soils. *Glob Environ Res-Engl Ed.* 2002;6(2):99–112.
22. Xue D, Wang Y, Sun H, Fu L, Zhu L, Lu J, Wu C. Effects of soil conditioner (volcanic ash) on yield quality and rhizosphere soil characteristics of melon. *Plants.* 2024;13(13):1787. <https://doi.org/10.3390/plants13131787>
23. Floyd CN, Lefroy RDB, D'souza EJ. Soil fertility and sweet potato production on volcanic ash soils in the highlands of Papua New Guinea. *Field Crops Res.* 1988;19(1):1–25. [https://doi.org/10.1016/0378-4290\(88\)90030-5](https://doi.org/10.1016/0378-4290(88)90030-5)
24. Piccolo EL, Ceccanti C, Lauria G, Santonocito G, Rosellini I, Pezzarossa B, Landi M. From lava to leaf: Physiological responses and trace element mobility in *Tilia cordata* L. trees grown in volcanic ash amended urban soil. *Urban For Urban Green.* 2024;99:128458. <https://doi.org/10.1016/j.ufug.2024.128458>
25. ISTA. International rules for seed testing, International Seed Testing Association. Wallisellen, Switzerland; 2022
26. Seward W, Edwards B. Testing hypotheses for the use of Icelandic volcanic ashes as low-cost, natural fertilizers. In: EGU General Assembly Conference Abstracts; 2012. p. 11493.
27. Siddiqui MH, Al-Whaibi MH. Role of nano-SiO₂ in germination of tomato (*Lycopersicon esculentum* Mill.) seeds. *Saudi J Biol Sci.* 2014;21(1):13–17. <https://doi.org/10.1016/j.sjbs.2013.04.005>
28. Karunakaran G, Suriyaprabha R, Rajendran V, Kannan N. Influence of ZrO₂, SiO₂, Al₂O₃ and TiO₂ nanoparticles on maize seed germination under different growth conditions. *IET Nanobiotechnol.* 2016;10(4):171–77. <https://doi.org/10.1049/iet-nbt.2015.0007>
29. Sun Y, Xu J, Miao X, Lin X, Liu W, Ren H. Effects of exogenous silicon on maize seed germination and seedling growth. *Sci Rep.* 2021;11(1):1014. <https://doi.org/10.1038/s41598-020-79723-y>
30. Krishnaarivanandhan A, Albert VA, Sujatha K, Kannan P, Arunachalam P. Effect of biogenic silica seed coating on sorghum (VAR. K 12) seed storage using different storage containers under ambient condition. *J Exper Agricul Intern.* 2024;46(10):113–25. <https://doi.org/10.9734/jeai/2024/v46i102930>
31. Vyas R, Sharma K. Phytotoxic activity of *Moringa oleifera* leaf extract on germination and seedling growth of tomato. *Plant Arch.* 2021;21(1):1231–39. <https://doi.org/10.51470/plantarchives.2021.v21.no1.164>
32. Hatcher PG, Schnitzer M, Vassallo AM, Wilson MA. The chemical structure of highly aromatic humic acids in three volcanic ash soils as determined by dipolar dephasing NMR studies. *Geochim Cosmochim Acta.* 1989;53(1):125–30. [https://doi.org/10.1016/0016-7037\(89\)90278-0](https://doi.org/10.1016/0016-7037(89)90278-0)
33. Delmelle P, Villiéras F, Pelletier M. Surface area, porosity and water adsorption properties of fine volcanic ash particles. *Bull Volcanol.* 2005;160–69. <https://doi.org/10.1007/s00445-004-0370-x>
34. Djobo JNY, Elimbi A, Tchakouté HK, Kumar S. Reactivity of volcanic ash in alkaline medium, microstructural and strength characteristics of resulting geopolymers under different synthesis conditions. *J Mater Sci.* 2016;51:10301–17. <https://doi.org/10.1007/s10853-016-0257-1>
35. Darmayanti L, Notodarmojo S, Damanhuri E, Kadja GTM, Mukti RR. Preparation of alkali-activated fly ash-based geopolymer and their application in the adsorption of copper (II) and zinc (II) ions. *MATEC Web Conf.* 2019;276:06012. <https://doi.org/10.1051/mateconf/201927606012>
36. Mozgawa W, Sitarz M, Rokita M. Spectroscopic studies of different aluminosilicate structures. *J Mol Struct.* 1999;512:251–57. [https://doi.org/10.1016/S0022-2860\(99\)00165-9](https://doi.org/10.1016/S0022-2860(99)00165-9)
37. Tchadjé LN, Djobo JN, Ranjbar N, Tchakouté HK, Kenne BD, Elimbi A, Njopwouo D. Potential of using granite waste as raw material for geopolymer synthesis. *Ceram Int.* 2015;42:3046–55. <https://doi.org/10.1016/j.ceramint.2015.10.091>
38. Jadhav RR, Tapase SR, Chandanshive VV, Gophane AD, Jadhav JP. Plant and yeast consortium for efficient remediation of dyes and effluents: a biochemical and toxicological study. *Int Microbiol.* 2024. <https://doi.org/10.1007/s10123-023-00464-9>
39. Chieng BW, Lee SH, Ibrahim NA, Then YY, Loo YY. Isolation and characterization of cellulose nanocrystals from oil palm mesocarp fiber. *Polymers.* 2017;9(8):355. <https://doi.org/10.3390/polym9080355>
40. Amin MN, Khan K. Mechanical performance of high-strength sustainable concrete under fire incorporating locally available volcanic ash in central Harrat Rahat, Saudi Arabia. *Materials.* 2020;14(1):21. <https://doi.org/10.3390/ma14010021>
41. Riley CM, Rose WI, Bluth GJS. Quantitative shape measurements of distal volcanic ash. *J Geophys Res.* 2003;108(B10):2504. <https://doi.org/10.1029/2001JB000818>
42. Mills OP, Rose WI. Shape and surface area measurements using scanning electron microscope stereo-pair images of volcanic ash particles. *Geosphere.* 2010;6(6):805–11. <https://doi.org/10.1130/GES00608.1>
43. Romano AL, Rovere EI. Application of electron microscopy on volcanic ash. *Microsc Microanal.* 2020;26(S1):19–20. <https://doi.org/10.1017/S1431927620000331>
44. Hussein MS, Ahmed MJ. Fixed bed and batch adsorption of benzene and toluene from aromatic hydrocarbons on 5A molecular sieve zeolite. *Mater Chem Phys.* 2016;181:512–17. <https://doi.org/10.1016/j.matchemphys.2016.06.088>
45. Pavithra S, Thandapani G, Sugashini S, Sudha PN, Alkhamis HH, Alrefaei AF, Almutairi MH. Batch adsorption studies on surface tailored chitosan/orange peel hydrogel composite for the

- removal of Cr(VI) and Cu(II) ions from synthetic wastewater. *Chemosphere*. 2021;271:129415. <https://doi.org/10.1016/j.chemosphere.2020.129415>
46. Ghanbarian M, Nabizadeh R, Mahvi AH, Nasser S, Naddafi K. Photocatalytic degradation of linear alkyl benzene sulfonate from aqueous solution by TiO₂ nanoparticles. *J Environ Health Sci Eng*. 2011;9:309–16.
 47. Choma J, Szczęśniak B, Kapusta A, Jaroniec M. A concise review on porous adsorbents for benzene and other volatile organic compounds. *Molecules*. 2024;29(23):5677. <https://doi.org/10.3390/molecules29235677>
 48. Martínez-del-Pozol, EsbríJM, García-LorenzoL, López-Andrés S. Synthesis of zeolites from volcanicash (Tajogaite, Spain) for the remediation of waters contaminated by fluoride. *Environ Sci Pollut Res*. 2024;31(5):7058–72. <https://doi.org/10.1007/s11356-023-31623-0>
 49. Osagie E, Owabor CN. Adsorption of benzene in batch system in natural clay and sandy soil. *Adv Chem Eng Sci*. 2015;5(3):352. <https://doi.org/10.4236/aces.2015.53037>
 50. Akpa JG, Nmegbu CGJ. Adsorption of benzene on activated carbon from agricultural waste materials. *Res J Chem Sci*. 2014;2231:606X.
 51. Mohammadi L, Bazrafshan E, Noroozifar M, Ansari-Moghaddam A, Barahuie F, Balarak D. Adsorptive removal of benzene and toluene from aqueous environments by cupric oxide nanoparticles: kinetics and isotherm studies. *J Chem*. 2017;2017:1–10. <https://doi.org/10.1155/2017/2069519>
 52. Özdemir U, Özbay B, Veli S, Zor S. Modeling adsorption of sodium dodecyl benzene sulfonate (SDBS) onto polyaniline (PANI) by using multi linear regression and artificial neural networks. *Chem Eng J*. 2011;178:183–90. <https://doi.org/10.1016/j.cej.2011.10.046>
 53. Thu NT, Thi N, Quang TV, Hong NK, Minh NT, Hoai LTN. Synthesis, characterization and effect of pH on degradation of dyes of copper-doped TiO₂. *J Exp Nanosci*. 2016;11(3):226–38. <https://doi.org/10.1080/17458080.2015.1053541>
 54. Farias MF, Domingos YS, Fernandes GJT, Castro FL, Fernandes Jr VJ, Costa MJF, et al. Effect of acidity in the removal-degradation of benzene in water catalyzed by Co-MCM-41 in medium containing hydrogen peroxide. *Microporous Mesoporous Mater*. 2018;258:33–40. <https://doi.org/10.1016/j.micromeso.2017.09.003>
 55. Jafari AJ, Kalantari R, Kermani M, HashamFirooz M. Photocatalytic oxidation of benzene by ZnO coated on glass plates under simulated sunlight. *Chem Pap*. 2019;73:635–44. <https://doi.org/10.1007/s11696-018-0621-5>
 56. Lyu J, Zhu L, Burda C. Considerations to improve adsorption and photocatalysis of low concentration air pollutants on TiO₂. *Catal Today*. 2014;225:24–33. <https://doi.org/10.1016/j.cattod.2013.10.089>
 57. Zhang T, Oyama T, Horikoshi S, Zhao J, Hidaka H, Serpone N. Assessment and influence of operational parameters on the TiO₂ photocatalytic degradation of sodium benzene sulfonate under highly concentrated solar light illumination. *Sol Energy*. 2001;71(5):305–13. [https://doi.org/10.1016/S0038-092X\(01\)00056-1](https://doi.org/10.1016/S0038-092X(01)00056-1)
 58. Djobo JNY, Tome S. Insights into alkali and acid-activated volcanic ash-based materials: A review. *Cem Concr Compos*. 2024;105660. <https://doi.org/10.1016/j.cemconcomp.2024.105660>
 59. Ciriminna R, Scurria A, Tizza G, Pagliaro M. Volcanic ash as multi-nutrient mineral fertilizer: Science and early applications. *J Sci Food Agric*. 2022;2(11):528–34. <https://doi.org/10.1002/jsf2.87>
 60. El-Desoky A, Hassan A, Mahmoud A. Volcanic ash as a material for soil conditioner and fertility. *J Soil Sci and Agri Eng*. 2018;9(10):491–95. <https://doi.org/10.21608/JSSAE.2018.36445>
 61. Jam BJ, Shekari F, Andalibi B, Fotovat R, Jafarian V, Najafi J, Mastinu A. Impact of silicon foliar application on the growth and physiological traits of *Carthamus tinctorius* L. exposed to salt stress. *Silicon*. 2023;15(3):1235–45. <https://doi.org/10.21608/jpp.2020.149789>
 62. Ahmed S, Iqbal M, Ahmad Z, Iqbal MA, Artyszak A, Sabagh AE, Hossain A. Foliar application of silicon-based nanoparticles improve the adaptability of maize (*Zea mays* L.) in cadmium contaminated soils. *Environ Sci Pollut Res*. 2023;30(14):41002–13. <https://doi.org/10.1007/s11356-023-25189-0>
 63. Chijioke SC, Onuoha CH, Chukwudoruo CS. Bioactive compositions and identification of functional groups of selected medicinal plants. *GSC Biol Pharm Sci*. 2024;27(1):8–27. <https://doi.org/10.30574/gscbps.2024.27.1.0106>
 64. Dickson MPB, Manga DJ, Pougong TE, Baenla J, Ebongue NL, Elimbi A. Effects of kinetic parameters on initial setting time, microstructure and mechanical strength of volcanic ash-based phosphate inorganic polymers. *Silicon*. 2022;1–13. <https://doi.org/10.1007/s12633-021-01140-1>